




Broadly used in epoxy resin filling capacitor.

■ Outline Drawing

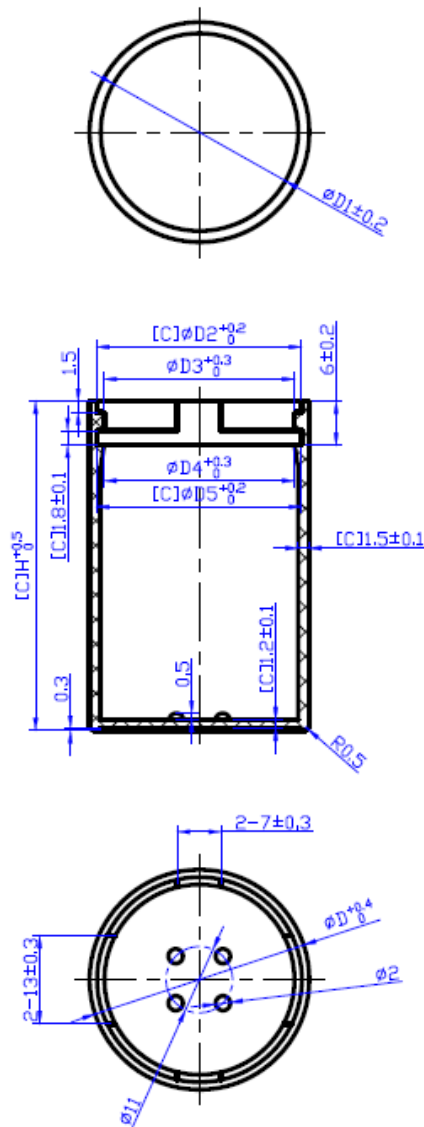

■ Features

- Suitable for infusion metallized film capacitor
- Stable performance
- High temperature resistance
- Material: PC, PBT, PCABS
- The content of hazardous substance is lower than the EU standards, such as ROHS\REACH



■ Specifications

Appearance requirements	Smooth and bright surface, even color and luster, without defect such as scratch, pore-free and etc.
Temperature resistance	126° /4h(taking PC as an example)
Voltage resistance	3000VAC, 60S, no breakdown
Flame retardant	Meeting UL94-V0

■ Dimensions(mm)

The mold can be developed according to customer needs.

Code	D	D1	D2	D3	D4	D5	H
S-SK-170	40	37	38	36.5	36.5	38	58